

IMPROVE YOUR EXPERIENCE

HI-FI CAR

HI-FI CAR CABLE



IMPROVE YOUR EXPERIENCE



CAR ENTER TAIN MENT

Phonocar's philosophy has always been to transform every journey into a unique experience, tailored just for you.

Our CAR HI-FI products enhance the time you spend behind the wheel, turning it into the perfect moment to enjoy your music!

ENTERTAINMENT, CUSTOMISATION
AND SOUND QUALITY





LOUDSPEAKERS

p. 4

SUPREME	p. 6
EVOLUTION	p. 16
SELECTION	p. 20
BASIC	p. 24

AMPLIFIER

4 CHANNELS, CLASS D	p. 26
---------------------------	-------

DSP

8 CHANNELS WITH APP	p. 26
---------------------------	-------

HI-FI CAR CABLE

CABLE KITS FOR HI-FI SYSTEMS	p. 28
POWER CABLE KITS FOR AMPLIFIERS	p. 29
CABLES FOR HI-FI SYSTEMS	
- POWER CABLE	p. 30
- SPEAKER CABLE	p. 30
- RCA CABLE	p. 31

All images are included for illustrative purposes only. Phonocar S.p.A. reserves the right to make changes to the products even without notice. Any changes to the products are to be considered improvements and do not affect their functionality. All mentioned trademarks and reproduced logos belong to their legitimate owners and have been indicated for information purposes only.

Pure Sound. Pure Drive.

LOUDSPEAKERS FOR EVERY LISTENING NEED.

Four product ranges designed to meet different requirements, yet united by a single philosophy: to deliver sound quality that surpasses the original system.

Four levels of quality, technology and investment, giving you the highest level of system customisation.

SUPREME

p. 6



~~evolution~~

p. 14



SELECTION

p. 18



basic

p. 22





WHEN SOUND TAKES SHAPE, IT BECOMES MUSIC.

SUPREME

THE ULTIMATE EXPRESSION OF OUR DNA AND OUR EXPERIENCE IN THE CAR HI-FI WORLD.

Born from the heart of the Phonocar team, the SUPREME range brings together tradition, technological innovation, refinement and performance: a unique acoustic concept paired with a design that is both elegant and bold.

Its aesthetics are driven by precise acoustic requirements, not decorative artifices, to ensure an extremely accurate musical reproduction and perfect synergy with the vehicle interior.



SUPERIOR TO ANY OTHER SOLUTION
in terms of neutrality, precision and power
inside the car.

MID-WOOFER

SUBWOOFER SPL

SEALED ENCLOSURES WITH ACTIVE and PASSIVE SUBWOOFERS

OPEN ENCLOSURES WITH ACTIVE and PASSIVE SUBWOOFERS





HI-SOUND DESIGN

MID-WOOFER W PEAK 540 Ø 200 mm 4 Ohm			02788
		MAIN FEATURES Power Handling Peak: 540 Watt. Power Handling Continuous: 180 Watt. Frequency response: 150÷10000 Hz. S.P.L.: 92 dB. Coil 50 mm.	
		MATERIALS Treated cellulose cone with exponential curvature. Triple-roll cotton fibre surround. Die-cast aluminium basket.	
DIMENSIONS Ø 208 x 87,67 mm. Woofer: Ø 200 x 87,67 mm.	PACK: 1 pc		Discover all technical specifications online

MID-WOOFER W PEAK 360 Ø 200 mm 4 Ohm			02787
		MAIN FEATURES Power Handling Peak: 360 Watt. Power Handling Continuous: 120 Watt. Frequency response: 150÷10000 Hz. S.P.L.: 91,3 dB. Coil 45 mm.	
		MATERIALS Treated cellulose cone with exponential curvature. Triple-roll cotton fibre surround.	
DIMENSIONS Ø 208 x 83 mm. Woofer: Ø 200 x 83 mm.	PACK: 1 pc		Discover all technical specifications online

MID-WOOFER W PEAK 240 Ø 165 mm 4 Ohm			02786
		MAIN FEATURES Power Handling Peak: 240 Watt. Power Handling Continuous: 80 Watt. Frequency response: 150÷10000 Hz. S.P.L.: 91,5 dB. Coil 38 mm.	
		MATERIALS Treated cellulose cone with exponential curvature. Triple-roll cotton fibre surround.	
DIMENSIONS Ø 167 x 61,5 mm. Woofer: Ø 165 x 61,5 mm.	PACK: 2 pcs		Discover all technical specifications online

SUBWOOFER FOR SPL SYSTEMS

02797

W PEAK 9000 | Ø 320 mm | 2+2 Ohm


Subwoofer delivering extraordinary performance and long-term efficiency.



30 kg OF PURE SOUND PRESSURE.


MAIN FEATURES

Power Handling Peak: 9000 Watt.
Power Handling Continuous: 1500+1500 Watt.
IMPEDANCE 2x2 Ω VOICE COIL.
S.P.L.: 85,8 dB.
Coil 100 mm.

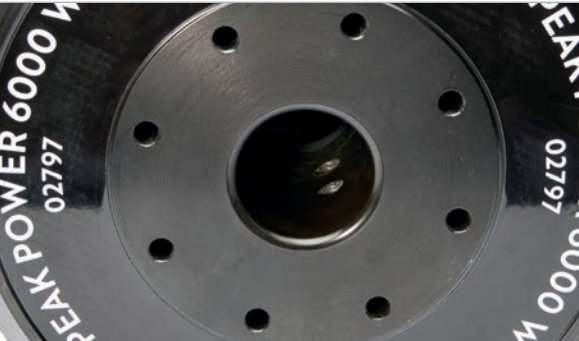

VENTILATION SYSTEM

externally and internally vented magnet.

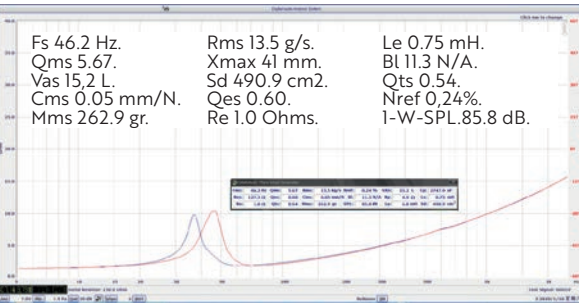

IMPEDANCE CURVE

OPTIONAL
RE-CONE KIT Code 02797R, consisting of:
cone with voice coil, dust cap and finishing trim.





COMPETITION-GRADE BASS.



DUAL 100 mm VOICE COIL
with soldered leads.

BASKET
die-cast aluminium basket.

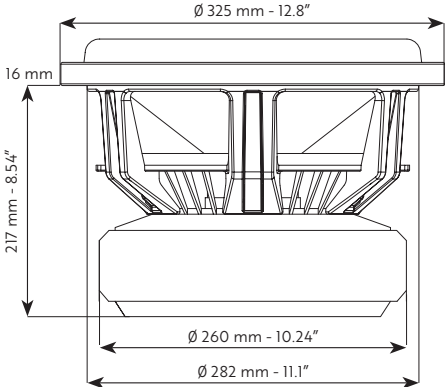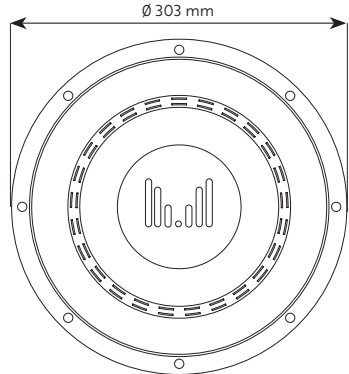

PACK: 1 pc



Discover all technical
specifications online

W PEAK 600 | Ø 250 mm

Active sealed enclosure with subwoofer, fully integrable into the OEM system. Class D amplifier.

**MAIN FEATURES**

Power Handling Peak: 600 Watt.
 Power Handling Continuous: 200 Watt.
 Frequency response: 45÷250 Hz.
 Class D amplifier

Extremely accurate musical reproduction.
 Powerful, deep and enveloping bass.
 Elegant yet aggressive design.
 Side-mounted amplifier panel and terminal block.
 In-car volume control via encoder.
 Side terminal block.


MATERIALS

12 mm thick wooden enclosure.
 Damped-treated cone.
 Copper voice coil Ø 54 mm with aluminium former.
 Sound-absorbing internal material.
 Anthracite-coloured carpet exterior.

MAXIMISES BASS PERFORMANCE WHILE MAINTAINING CLEAN, DISTORTION-FREE REPRODUCTION

**DIMENSIONS**

500 x 355 x 163 mm.

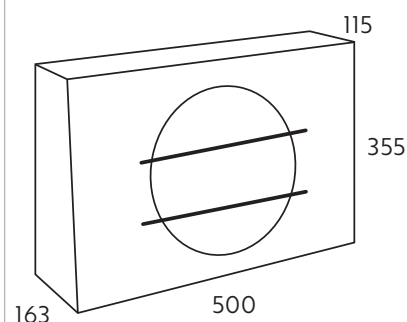**IN-CAR VOLUME ENCODER**

PACK: 1 pc



Discover all technical specifications online

PASSIVE SUBWOOFER SEALED ENCLOSURE | EXTRALARGE

02923

W PEAK 600 | Ø 250 mm | 4 Ohm

Passive sealed enclosure with subwoofer, fully integrable into the OEM system.



MAIN FEATURES

Power Handling Peak: 600 Watt.
Power Handling Continuous: 200 Watt.
Frequency response: 20÷300 Hz.

MATERIALS


12 mm thick wooden enclosure.
Damped-treated cone.
Copper voice coil Ø 54 mm with aluminium former.
Sound-absorbing internal material.
Anthracite-coloured carpet exterior.

SIDE TERMINAL BLOCK



DIMENSIONS

500 x 355 x 163 mm.

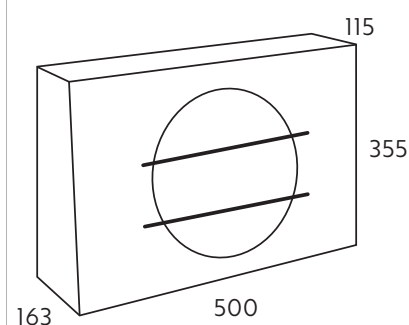

PACK: 1 pc



Discover all technical
specifications online



PASSIVE SUBWOOFER SEALED ENCLOSURE | LARGE

02922

W PEAK 420 | Ø 200 mm | 4 Ohm

Passive sealed enclosure with subwoofer, fully integrable into the OEM system.



MAIN FEATURES

Power Handling Peak: 420 Watt.
Power Handling Continuous: 140 Watt.
Frequency response: 200÷300 Hz.

MATERIALS

12 mm thick wooden enclosure.
Damped-treated cone.
Copper voice coil Ø 54 mm with aluminium former.
Sound-absorbing internal material.
Anthracite-coloured carpet exterior.
Side terminal block.

DIMENSIONS

448 x 268 x 130 mm.

PACK: 1 pc



Discover all technical specifications online



PASSIVE SUBWOOFER SEALED ENCLOSURE | COMPACT

02921

W PEAK 420 | Ø 200 mm | 4 Ohm

Passive sealed enclosure with subwoofer, fully integrable into the OEM system.



MAIN FEATURES


Power Handling Peak: 420 Watt.
Power Handling Continuous: 140 Watt.
Frequency response: 20÷300 Hz.

MATERIALS

12 mm thick wooden enclosure.
Damped-treated cone.
Copper voice coil Ø 54 mm with aluminium former.
Sound-absorbing internal material.
Anthracite-coloured carpet exterior.
Side terminal block.

DIMENSIONS

260 x 235 x 190 mm.



PACK: 1 pc



Discover all technical
specifications online

ACTIVE SUBWOOFER BASS REFLEX SYSTEM

02944

W PEAK 450 | Ø 300 mm | 4 Ohm

Active open speaker enclosure with subwoofer, fully integrable into the OEM system. Class-D amplifier.



MAIN FEATURES


Power Handling Peak: 450 Watt.
Power Handling Continuous: 150 Watt.
S.P.L.: 87 dB.
Con X-Over 40÷160 Hz 12 Db/Oct.
Phase rotation 0/180°.
Input sensibility:
HIGH 200 mV÷2.5V
LOW >12V.

Class D amplifier.
Amplifier power supply 14,4 V.

Side reflex port.
Powerful, exceptionally precise bass.
Harmonic distortion reduced to the bare minimum.
Outstanding performance in SPL systems.
Robust and lightweight.



REAR TERMINAL BLOCK

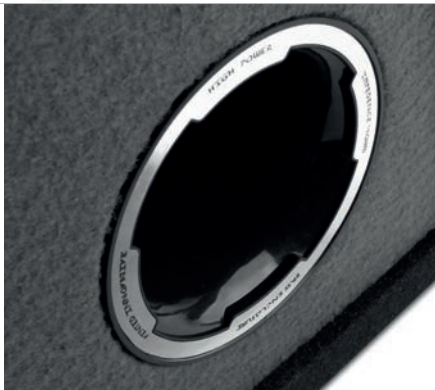


SIDE REFLEX PORT



DUAL-LAYER CONE



DIMENSIONS
490 x 350 x 360 mm.

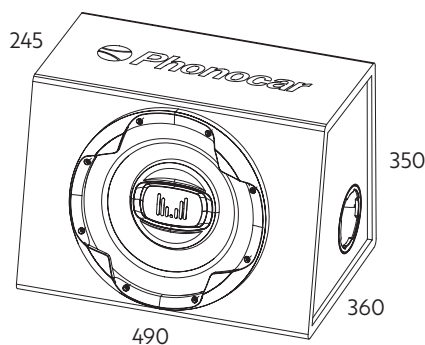

PACK: 1 pc



Discover all technical specifications online



PASSIVE SUBWOOFER BASS REFLEX SYSTEM


02945

W PEAK 690 | Ø 300 mm | 4 Ohm

Passive open speaker enclosure with subwoofer, integrable into the OEM system.



DIMENSIONS
520 x 350 x 370 mm.

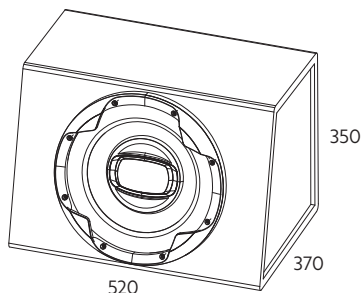

MAIN FEATURES

Power Handling Peak: 690 Watt.
Power Handling Continuous: 230 Watt.
Frequency response: 25÷200 Hz. Ø
300 mm loudspeaker with dual-layer
cone.
S.P.L.: 87 dB.
With X-Over 90 Hz 12 Db/Oct.

PACK: 1 pc



Discover all technical
specifications online

evolution

EXPERIENCE THE THRILL OF "LIVE" SOUND WHILE YOU'RE ON THE MOVE

The Evolution series takes listening performance to an extraordinary level, transcending time and space and coming remarkably close to the absolute perfection of a live performance.

TECHNOLOGY, MATERIALS AND DESIGN

Products of outstanding quality, in both form and substance.

Components built using carefully selected materials and refined, elegant design make the Evolution range the ideal choice for discerning customers.



WOOFER

MID-WOOFER

2-WAY SYSTEM KIT

2-WAY COAXIALS

SUBWOOFER

TWEETER

CROSSOVER



WOOFER | W PEAK 600 | Ø 165 mm | 4 Ohm**02627****MAIN FEATURES**

Power Handling Peak: 300 Watt.
Power Handling Continuous: 100 Watt.
Frequency response: 70÷6000 Hz.
S.P.L.: 91 dB.

PP and Mica cone.

DIMENSIONS

Ø 167 x 64 mm.
Woofer: Ø 165 x 64 mm.

PACK: 2 pcs

**WOOFER | W PEAK 420 | Ø 165 mm | 4 Ohm****02625****MAIN FEATURES**

Power Handling Peak: 210 Watt.
Power Handling Continuous: 70 Watt.
Frequency response: 70÷6500 Hz.
S.P.L.: 92 dB.

PP and Mica cone.

DIMENSIONS

Ø 167 x 61 mm.
Woofer: Ø 165 x 61 mm.

PACK: 2 pcs

**WOOFER | W PEAK 300 | Ø 130 mm | 4 Ohm****02624****MAIN FEATURES**

Power Handling Peak: 150 Watt.
Power Handling Continuous: 50 Watt.
Frequency response: 70÷7000 Hz.
S.P.L.: 90 dB.

PP and Mica cone.

DIMENSIONS

Ø 140 x 58 mm.
Woofer: Ø 130 x 58 mm.

PACK: 2 pcs

**MID-WOOFER | W PEAK 150 | Ø 100 mm | 4 Ohm****02622****MAIN FEATURES**

Power Handling Peak: 75 Watt.
Power Handling Continuous: 25 Watt.
Frequency response: 90÷7000 Hz.
S.P.L.: 92 dB.

PP and Mica cone.

DIMENSIONS

Ø 116 x 53 mm.
Woofer: Ø 100 x 53 mm.

PACK: 2 pcs

**2-WAY COAXIALS | W PEAK 300 | Ø 165 mm | 4 Ohm****02616****MAIN FEATURES**

Power Handling Peak: 150 Watt.
Power Handling Continuous: 50 Watt.
Frequency response: 55÷20000 Hz.
S.P.L.: 92 dB.

PP and Mica cone.
Silk Dome Tweeter.

DIMENSIONS

Ø 167 x 84 mm.
Woofer: Ø 165 x 61 mm.
Dome Tweeter: Ø 25 mm.

PACK: 2 pcs



DUAL VOICE COIL SUBWOOFER | W PEAK 2000 | Ø 300 mm | 4 Ohm 02629**MAIN FEATURES**

Power Handling Peak: 1000 + 1000.
Power Handling Continuous: 250 + 250.
Frequency response: 25÷1400 Hz.
S.P.L.: 88 dB.

PP and Mica cone.
Aluminium basket.

PACK: 1 pc**DIMENSIONS**

Ø 325 x 202 mm.
Woofer: Ø 300 x 182 mm.
Coil Ø 50 mm.

DUAL VOICE COIL SUBWOOFER | W PEAK 900 | Ø 250 mm | 4 Ohm 02628**MAIN FEATURES**

Power Handling Peak: 450 + 450.
Power Handling Continuous: 150 + 150.
Frequency response: 25÷1500 Hz.
S.P.L.: 88 dB.

PP and Mica cone.

PACK: 1 pc**DIMENSIONS**

Ø 260 x 168 mm.
Woofer: Ø 250 x 150 mm.
Coil Ø 50 mm.

HORN TWEETER | W PEAK 1500 crossover 7 Khz | Ø 97 mm | 4 Ohm 02430**MAIN FEATURES**

Power Handling:
Peak: 750 Watt (x2) crossover 7 Khz.
Cont.: 250 Watt (x2) crossover 7 Khz.
Frequency response: 2500÷22000 Hz.
S.P.L.: 93 dB.

Titanium Dome Tweeter.
Ferrite magnet.

PACK: 2 pcs**DIMENSIONS**

Ø 97 x 38 mm.
Coil: 25 mm.

DOMTWEETER | W PEAK 1050 crossover 7 Khz | Ø 42 mm | 4 Ohm 02421

Ideal for HI-END systems, featuring a dedicated mounting system for quick installation even on curved surfaces.

**MAIN FEATURES**

Power Handling:
Peak: 525 Watt (x2) crossover 7 Khz.
Cont.: 175 Watt (x2) crossover 7 Khz.
Frequency response: 1500÷20000 Hz.
S.P.L.: 91 dB.

Silk Dome Tweeter.
Neodymium magnet.

PACK: 2 pcs**DIMENSIONS**

Ø 42 x 8 mm.
Coil: 25 mm.

EXTREMELY WIDE AND LINEAR SOUND DISPERSION

DOMTWEETER | W PEAK 420 crossover 8 Khz | Ø 46,5 mm | 4 Ohm 02419**MAIN FEATURES**

Power Handling:
Peak: 210 Watt (x2) crossover 8 Khz.
Cont.: 70 Watt (x2) crossover 8 Khz.
Frequency response: 1500÷20000 Hz.
S.P.L.: 90 dB.

Silk Dome Tweeter.
Neodymium magnet.

PACK: 2 pcs**DIMENSIONS**

Ø 46,5 x 18 mm.

2-WAY SYSTEM KIT | W PEAK 600 | Ø 165 mm | 4 Ohm**02689**

KIT comprising 2 Ø165 WOOFERS, 2 THREE-WAY CROSSOVERS and 2 Ø46.5 DOME TWEETERS.

**WOOFER**

Power Handling:
Peak 300 Watt (x2).
Continuous 100 Watt (x2).
Frequency response:
70÷6000 Hz.
S.P.L.: 91 dB.

PP and Mica cone.
Ø 167 x 64 mm.

DOME TWEETER

Power Handling:
Peak 210 Watt (x2).
Continuous 70 Watt (x2).
Frequency response:
1500÷20000 Hz.
S.P.L.: 90 dB.

Silk Dome Tweeter.
Neodymium magnet.
Ø 46,5 x 18 mm.

CROSSOVER

Type: 2 way passive.
Power Handling:
Peak 300 Watt (x2).
Continuous 100 Watt (x2).
Frequency response:
3800 Hz.
CUT-OFF-SL: 12 dB/oct.

76 x 134 x 36 mm.

PACK

2 Woofer
2 Tweeter
2 Crossover

**2-WAY SYSTEM KIT | W PEAK 420 | Ø 165 mm | 4 Ohm****02687**

KIT comprising 2 Ø165 WOOFERS, 2 THREE-WAY CROSSOVERS and 2 Ø46.5 DOME TWEETERS.

**WOOFER**

Power Handling:
Peak 210 Watt (x2).
Continuous 70 Watt (x2).
Frequency response:
70÷6500 Hz.
S.P.L.: 92 dB.

PP and Mica cone.
Ø 167 x 61 mm.

DOME TWEETER

Power Handling:
Peak 210 Watt (x2).
Continuous 70 Watt (x2).
Frequency response:
1500÷20000 Hz.
S.P.L.: 90 dB.

Silk Dome Tweeter.
Neodymium magnet.
Ø 46,5 x 18 mm.

CROSSOVER

Type: 2 way passive.
Power Handling:
Peak 300 Watt (x2).
Continuous 100 Watt (x2).
Frequency response:
3800 Hz.
CUT-OFF-SL: 12 dB/oct.

76 x 134 x 36 mm.

PACK

2 Woofer
2 Tweeter
2 Crossover

**2-WAY SYSTEM KIT | W PEAK 300 | Ø 130 mm | 4 Ohm****02684**

KIT comprising 2 Ø130 WOOFERS, 2 THREE-WAY CROSSOVERS and 2 Ø46.5 DOME TWEETERS.

**WOOFER**

Power Handling:
Peak 150 Watt (x2).
Continuous 50 Watt (x2).
Frequency response:
70÷7000 Hz.
S.P.L.: 90 dB.

PP and Mica cone.
Ø 140 x 58 mm.

DOME TWEETER

Power Handling:
Peak 210 Watt (x2).
Continuous 70 Watt (x2).
Frequency response:
1500÷20000 Hz.
S.P.L.: 90 dB.

Silk Dome Tweeter.
Neodymium magnet.
Ø 46,5 x 18 mm.

CROSSOVER

Type: 2 way passive.
Power Handling:
Peak 300 Watt (x2).
Continuous 100 Watt (x2).
Frequency response:
3800 Hz.
CUT-OFF-SL: 12 dB/oct.

76 x 134 x 36 mm.

PACK

2 Woofer
2 Tweeter
2 Crossover

**3-WAY PASSIVE CROSSOVER | W PEAK 600 | 4 Ohm****05346**

Power Handling Peak: 300 Watt (x2).
Power Handling Continuous: 100 Watt (x2).
Frequency response: 1000÷6000 Hz.
CUT-OFF-SL: 12 dB/oct.

DIMENSIONS

76 x 134 x 36 mm.

PACK: 2 pcs

**2-WAY PASSIVE CROSSOVER | W PEAK 600 | 4 Ohm****05345**

Power Handling Peak: 300 Watt (x2).
Power Handling Continuous: 100 Watt (x2).
Frequency response: 3800 Hz.
CUT-OFF-SL: 12 dB/oct

DIMENSIONS

76 x 134 x 36 mm.

PACK: 2 pcs

**TWEETER CROSSOVER | W PEAK 300 | 4 Ohm****05338**

Power Handling Peak: 150 Watt (x2).
Power Handling Continuous: 50 Watt (x2).
Frequency response: 4500 Hz.
CUT-OFF-SL: 12 dB/oct


DIMENSIONS

40 x 20 x 23 mm.

PACK: 2 pcs



SELECTION

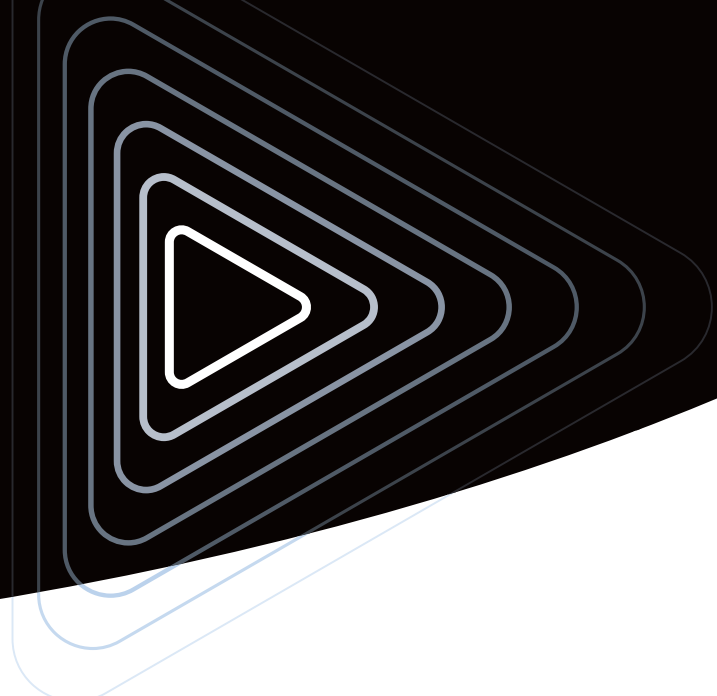

HIGH FIDELITY HAS SOLID FOUNDATIONS

A must-have for those seeking flawless acoustic performance inside the vehicle, combined with components of proven robustness.

RICH DETAIL AND LOW POWER CONSUMPTION

Linear audio reproduction, rich in detail across the entire frequency range, with minimal power demand from the source, makes the SELECTION line ideal for a wide range of applications.

WOOFER

MID-WOOFER

2-WAY COAXIALS – 2-WAY MARINE COAXIALS

2-WAY SYSTEM KIT



WOOFER | W PEAK 780 | Ø 200 mm | 4 Ohm**02087****MAIN FEATURES**

Power Handling Peak: 390 Watt.
Power Handling Continuous: 130 Watt.
Frequency response: 40÷3500 Hz.
S.P.L.: 90 dB.

PP cone.

DIMENSIONS

Ø 212 x 74 mm.
Woofer: Ø 200 x 74 mm.

PACK: 2 pcs

**WOOFER | W PEAK 210 | Ø 165 mm | 4 Ohm****02086****MAIN FEATURES**

Power Handling Peak: 105 Watt.
Power Handling Continuous: 35 Watt.
Frequency response: 70÷6500 Hz.
S.P.L.: 92 dB.

PP cone.

DIMENSIONS

Ø 167 x 60 mm.
Woofer: Ø 165 x 60 mm.

PACK: 2 pcs

**WOOFER EXTRAFLAT | W PEAK 210 | Ø 165 mm | 4 Ohm****02085****MAIN FEATURES**

Power Handling Peak: 105 Watt.
Power Handling Continuous: 35 Watt.
Frequency response: 70÷6500 Hz.
S.P.L.: 91 dB.

PP cone.

DIMENSIONS

Ø 167 x 56,5 mm.
Woofer: Ø 165 x 56,5 mm.

PACK: 2 pcs

**WOOFER | W PEAK 150 | Ø 130 mm | 4 Ohm****02083****MAIN FEATURES**

Power Handling Peak: 75 Watt.
Power Handling Continuous: 25 Watt.
Frequency response: 70÷7000 Hz.
S.P.L.: 90 dB.

PP cone.

DIMENSIONS

Ø 139,3 x 55 mm.
Woofer: Ø 130 x 55 mm.

PACK: 2 pcs

**MID-WOOFER | W PEAK 150 | Ø 100 mm | 4 Ohm****02081****MAIN FEATURES**

Power Handling Peak: 75 Watt.
Power Handling Continuous: 25 Watt.
Frequency response: 80÷7500 Hz.
S.P.L.: 92 dB.

PP cone.

DIMENSIONS

Ø 116 x 45 mm.
Woofer: Ø 100 x 45 mm.

PACK: 2 pcs

**2-WAY MARINE COAXIALS | W PEAK 210 | Ø 165 mm | 4 Ohm****02047****MAIN FEATURES**

Power Handling Peak: 105 Watt.
Power Handling Continuous: 35 Watt.
Frequency response: 80÷20000 Hz.
S.P.L.: 92 dB.

PP cone.

Dome Tweeter in Polycarbonate.

DIMENSIONS

Ø 179,3 x 79 mm.
Woofer: Ø 165 x 60 mm.
Dome Tweeter: Ø 15 mm.

PACK: 2 pcs





2-WAY COAXIALS W PEAK 210 Ø 165 mm 4 Ohm			02046
	MAIN FEATURES Power Handling Peak: 105 Watt. Power Handling Continuous: 35 Watt. Frequency response: 80÷20000 Hz. S.P.L.: 92 dB. PP cone. Dome Tweeter in Polycarbonate.	DIMENSIONS Ø 167 x 76 mm. Woofer: Ø 165 x 60 mm. Dome Tweeter: Ø 15 mm.	PACK: 2 pcs 
2-WAY COAXIALS EXTRAFLAT W PEAK 210 Ø 165 mm 4 Ohm			02045
	MAIN FEATURES Power Handling Peak: 105 Watt. Power Handling Continuous: 35 Watt. Frequency response: 70÷19000 Hz. S.P.L.: 92 dB. PP cone. Dome Tweeter in Polycarbonate.	DIMENSIONS Ø 167 x 71,9 mm. Woofer: Ø 165 x 56,5 mm. Dome Tweeter: Ø 15 mm.	PACK: 2 pcs 
2-WAY COAXIALS W PEAK 150 Ø 130 mm 4 Ohm			02043
	MAIN FEATURES Power Handling Peak: 75 Watt. Power Handling Continuous: 25 Watt. Frequency response: 70÷19000 Hz. S.P.L.: 92 dB. PP and Mica cone. Dome Tweeter in Polycarbonate.	DIMENSIONS Ø 139,3 x 67,8 mm. Woofer: Ø 130 x 52 mm. Dome Tweeter: Ø 15 mm.	PACK: 2 pcs 
2-WAY COAXIALS W PEAK 150 Ø 100 mm 4 Ohm			02041
	MAIN FEATURES Power Handling Peak: 75 Watt. Power Handling Continuous: 25 Watt. Frequency response: 70÷19000 Hz. S.P.L.: 92 dB. PP and Mica cone.	Dome Tweeter in Polycarbonate. DIMENSIONS Ø 116 x 58 mm. Woofer: Ø 100 x 45,2 mm. Dome Tweeter: Ø 15 mm.	PACK: 2 pcs 

2-WAY SYSTEM KIT | W PEAK 210 | Ø 165 mm | 4 Ohm**02097**

KIT comprising 2 Ø165 WOOFERS, 2 CROSSOVERS and 2 Ø46,5 DOME TWEETERS.

	WOOFER Power Handling: Peak 105 Watt. Continuous 35 Watt. Frequency response: 70÷6500 Hz. S.P.L.: 92 dB.	DOME TWEETER Power Handling: Peak 210 Watt. Continuous 70 Watt. Frequency response: 1500÷20000 Hz. S.P.L.: 90 dB.	CROSSOVER Power Handling: Peak 150 Watt. Continuous 50 Watt. Frequency response: 4500 Hz. CUT-OFF-SL: 12 dB/oct. 40 x 20 x 23 mm.	PACK 2 Woofer 2 Tweeter 2 Crossover
	PP cone. Ø 167 x 60 mm. Woofer: Ø 165 x 60 mm.	Silk Dome Tweeter. Neodymium magnet. Ø 46,5 x 18 mm.		

2-WAY SYSTEM KIT | W PEAK 150 | Ø 130 mm | 4 Ohm**02094**

KIT comprising 2 Ø165 WOOFERS, 2 CROSSOVERS and 2 Ø46,5 DOME TWEETERS.

	WOOFER Power Handling: Peak 75 Watt. Continuous 25 Watt. Frequency response: 70÷7000 Hz. S.P.L.: 90 dB.	DOME TWEETER Power Handling: Peak 210 Watt. Continuous 70 Watt. Frequency response: 1500÷20000 Hz. S.P.L.: 90 dB.	CROSSOVER Power Handling: Peak 150 Watt. Continuous 50 Watt. Frequency response: 4500 Hz. CUT-OFF-SL: 12 dB/oct. 40 x 20 x 23 mm.	PACK 2 Woofer 2 Tweeter 2 Crossover
	PP cone. Ø 139,3 x 55 mm. Woofer: Ø 130 x 55 mm.	Silk Dome Tweeter. Neodymium magnet. Ø 46,5 x 18 mm.		

2-WAY SYSTEM KIT | W PEAK 150 | Ø 100 mm | 4 Ohm**02091**

KIT comprising 2 Ø130 MID-WOOFERS, 2 CROSSOVERS and 2 Ø46,5 DOME TWEETERS.

	MID-WOOFER Power Handling: Peak 75 Watt. Continuous 25 Watt. Frequency response: 80÷7500 Hz. S.P.L.: 92 dB.	DOME TWEETER Power Handling: Peak 210 Watt. Continuous 70 Watt. Frequency response: 1500÷20000 Hz. S.P.L.: 90 dB.	CROSSOVER Power Handling: Peak 150 Watt. Continuous 50 Watt. Frequency response: 4500 Hz. CUT-OFF-SL: 12 dB/oct. 40 x 20 x 23 mm.	PACK 2 Woofer 2 Tweeter 2 Crossover
	PP cone. Ø 116 x 45 mm. Woofer: Ø 100 x 45 mm.	Silk Dome Tweeter. Neodymium magnet. Ø 46,5 x 18 mm.		

BUILT TO GO THE DISTANCE, IN MUSIC AND IN TIME

Designed to last and appreciated for its reliability, the BASIC line offers loudspeakers with accurate, fatigue-free sound.

PERFECT FOR A FIRST-LEVEL UPGRADE

DUAL CONE W PEAK 150 Ø 165 mm 4 Ohm				66126
		MAIN FEATURES Power Handling Peak: 75 Watt. Power Handling Continuous: 25 Watt. Frequency response: 70÷13000 Hz. S.P.L.: 90 dB. PP cone.	DIMENSIONS Ø 166 x 55 mm. Woofer: Ø 165 x 55 mm.	PACK: 2 pcs 
DUAL CONE W PEAK 120 Ø 130 mm 4 Ohm				66123
		MAIN FEATURES Power Handling Peak: 60 Watt. Power Handling Continuous: 20 Watt. Frequency response: 80÷17000 Hz. S.P.L.: 90 dB. PP cone.	DIMENSIONS Ø 139,3 x 43 mm. Woofer: Ø 130 x 43 mm.	PACK: 2 pcs 
DUAL CONE W PEAK 120 Ø 100 mm 4 Ohm				66121
		MAIN FEATURES Power Handling Peak: 60 Watt. Power Handling Continuous: 20 Watt. Frequency response: 90÷13000 Hz. S.P.L.: 90 dB. PP cone.	DIMENSIONS Ø 116 x 37 mm. Woofer: Ø 100 x 37 mm.	PACK: 2 pcs 
DUAL CONE W PEAK 90 Ø 87 mm 4 Ohm				66120
		MAIN FEATURES Power Handling Peak: 45 Watt. Power Handling Continuous: 15 Watt. Frequency response: 100÷13000 Hz. S.P.L.: 90 dB. PP cone.	DIMENSIONS Ø 87.	PACK: 2 pcs 

3-WAY COAXIALS WITH GRILLE | W PEAK 240 | 160 x 240 mm | 4 Ohm **66035**



MAIN FEATURES

Power Handling Peak: 120 Watt.
Power Handling Continuous: 40 Watt.
Frequency response: 65÷18000 Hz.
S.P.L.: 90 dB.

PP cone.

DIMENSIONS

Ø 160 x 240 mm.

PACK: 2 pcs



2-WAY COAXIALS | W PEAK 180 | Ø 165 mm | 4 Ohm

66026



MAIN FEATURES

Power Handling Peak: 90 Watt.
Power Handling Continuous: 30 Watt.
Frequency response: 70÷17000 Hz.
S.P.L.: 90 dB.

PP cone.

DIMENSIONS

Ø 166 x 55 mm.
Woofer: Ø 165 x 55 mm.

PACK: 2 pcs



2-WAY COAXIALS | W PEAK 180 | Ø 130 mm | 4 Ohm

66023



MAIN FEATURES

Power Handling Peak: 90 Watt.
Power Handling Continuous: 30 Watt.
Frequency response: 80÷17000 Hz.
S.P.L.: 90 dB.

PP cone.

DIMENSIONS

Ø 139,3 x 42 mm.
Woofer: Ø 130 x 42 mm.

PACK: 2 pcs



2-WAY COAXIALS WITH GRILLE | W PEAK 180 | Ø 130 mm | 4 Ohm

66024



MAIN FEATURES

Power Handling Peak: 90 Watt.
Power Handling Continuous: 30 Watt.
Frequency response: 80÷17000 Hz.
S.P.L.: 90 dB.

PP cone.

DIMENSIONS

Ø 139,3 x 42 mm.
Woofer: Ø 130 x 42 mm.

PACK: 2 pcs



2-WAY COAXIALS | W PEAK 180 | Ø 100 mm | 4 Ohm

66020



MAIN FEATURES

Power Handling Peak: 90 Watt.
Power Handling Continuous: 30 Watt.
Frequency response: 90÷20000 Hz.
S.P.L.: 90 dB.

PP cone.

DIMENSIONS

Ø 116 x 42 mm.
Woofer: Ø 100 x 42 mm.

PACK: 2 pcs



2-WAY COAXIALS WITH GRILLE | W PEAK 180 | Ø 100 mm | 4 Ohm

66022



MAIN FEATURES

Power Handling Peak: 90 Watt.
Power Handling Continuous: 30 Watt.
Frequency response: 90÷17000 Hz.
S.P.L.: 90 dB.

PP cone.

DIMENSIONS

Ø 116 x 42 mm.
Woofer: Ø 100 x 42 mm.

PACK: 2 pcs



2-WAY COAXIALS | W PEAK 180 | 90 x 150 mm | 4 Ohm

66021



MAIN FEATURES

Power Handling Peak: 90 Watt.
Power Handling Continuous: 30 Watt.
Frequency response: 90÷20000 Hz.
S.P.L.: 90 dB.

PP cone.


DIMENSIONS

Ø 90 x 150 mm.

PACK: 2 pcs



Power. Control. Pure Music.

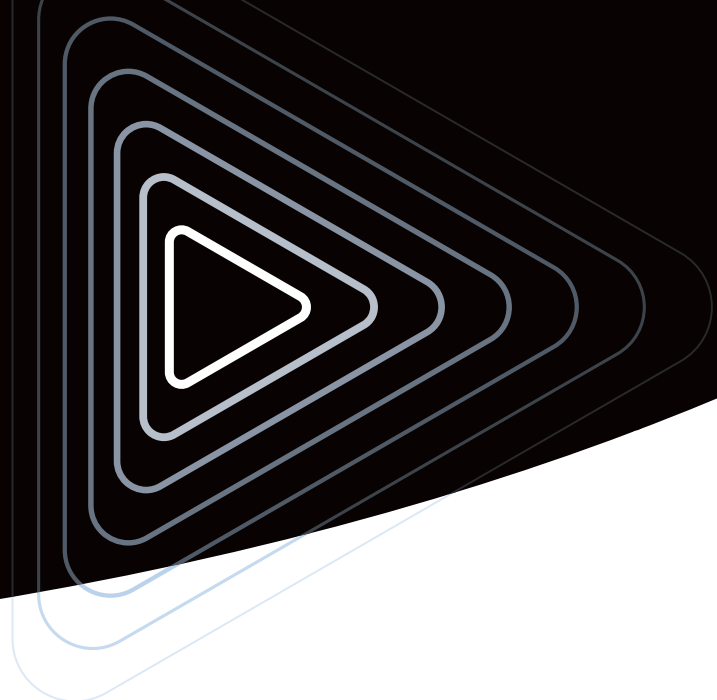

Maximum customisation for a tailored listening experience.

Precise frequency management and clean power delivery:
DSPs and amplifiers designed to get the very best from your Hi-Fi system.

DSP

Digital Signal Processor

Advanced adjustments and complete signal management.

HeD
AMPLIFIER

High Efficiency Technology

Compact, high-performance Class D amplifier.

DSP with App | 8 CHANNELS | 10/16V


PH908

Ideal for professional audio system customisation.
Ensures complete channel management and total sound control directly from your smartphone.



MAIN FEATURES

- 8 fully configurable RCA output channels
- 4 summable Low-Level inputs
- 4 summable High-Level inputs
- 31 equalisation bands per channel
- Independent Time Delay on each channel
- Crossover on each channel
- Level and phase adjustment on each channel
- 5 plug-in connectors included
- App for iOS and Android

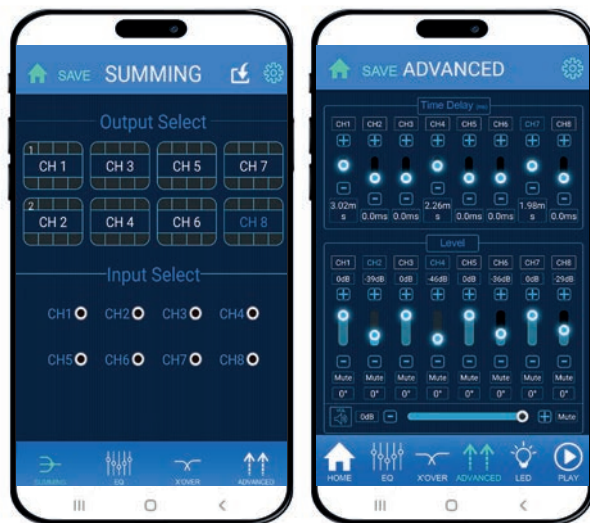

PhonocarDSP

Download on the App Store

UNLIMITED CUSTOMISATION

For each of the 8 channels, it is possible to programme level and phase with 31 bands of equalisation, offering maximum freedom of adjustment.

MOBILE APP

Free and available on the App Store.
For Android smartphones: download the APK and install it from the Phonocar catalogue website (see QR code below).

DIMENSIONS

142,9 x 92 x 35 mm.

PACK: 1 pc



Discover all technical specifications online

Class D Amplifier | 4 CHANNELS | W PEAK 70x4

PH284D

The perfect amplifier for upgrading the factory system:
it increases system dynamics and efficiency without changing speakers or wiring.



MAIN FEATURES

- Class D.
- 4 channels.
- WATT MAX: 70x4 (4 Ohm).
- WATT RMS: 35x4 (4 Ohm).
- Distortion: < 0,2%.
- Crossover High/low pass: 100 Hz.
- Frequency response: 10>22000.
- Low-Level input: 50W max.
- Cable lenght 50 cm.
- ISO UNI connections.
- Power Remote: Automatic / +12V.

COMPACT, HIGH-EFFICIENCY AND EXTREMELY VERSATILE

DIMENSIONS 163 x 82 x 35 mm.

WIDE COMPATIBILITY WITH DEDICATED WIRING KITS.

Visit the catalogue website: catalogue.phonocar.com

CAR ENTERTAINMENT/ACCESSORIES/CABLES/ISO CABLE FOR HANDS-FREE KIT

PACK: 1 pc



Discover all technical specifications online

HI-FI CAR CABLE

CABLE KITS FOR HI-FI SYSTEMS

60 A | AGU FUSE 80 A

06097


●	1 positive power supply cable. 1 AGU fuse 80 A. 1 golden AGU fuse holder.	20 mm ²	5 m
●	1 negative power supply cable.	20 mm ²	1 m
●	1 loudspeaker cable.	2x1,5 mm ²	10 m
●	1 double shielding RCA audio cable.	Ø 3 mm	5 m
	4 terminals. 10 cable ties.		



60 A | AFC FUSE 80 A

06098


●	1 positive power supply cable. 1 AFC fuse 80 A. 1 nickel AFC fuse-holder.	21 mm ²	5,5 m
●	1 negative power supply cable.	21 mm ²	70 cm
●	1 loudspeaker cable.	2x2 mm ²	10 m
●	1 double shielding balanced RCA audio cable.	Ø 6 mm	5 m
	4 terminals.		



50 A | AGU FUSE 70 A

06095


●	1 positive power supply cable. 1 AGU fuse 70 A. 1 golden AGU fuse holder.	12 mm ²	5 m
●	1 negative power supply cable.	12 mm ²	1 m
●	1 loudspeaker cable.	2x1,5 mm ²	10 m
●	1 double shielding RCA audio cable.	Ø 3 mm	5 m
	4 terminals. 10 cable ties.		



40A | AFC FUSE 60 A

06096


●	1 positive power supply cable. 1 AFC fuse 60 A. 1 nickel AFC fuse-holder.	8,5 mm ²	5,5 m
●	1 negative power supply cable.	8,5 mm ²	70 cm
●	1 loudspeaker cable.	2x2 mm ²	10 m
●	1 double shielding balanced RCA audio cable.	Ø 6 mm	5 m
	4 terminals.		





POWER CABLE KITS FOR AMPLIFIERS

80A					04286
		Power supply cable. 1 fuse 60 A. 1 fuse-holder.	20 mm ²	5 m	
		Power supply cable.	20 mm ²	1 m	
		Loudspeaker cable.	2x1,5 mm ²	10 m	
		Double shielding RCA audio cable.		5 m	
		2 terminals.			
50A					06092
		Positive power supply cable.	12 mm ²	5 m	
		Negative power supply cable.	12 mm ²	1 m	
50A					06093
		Positive power supply cable.	16 mm ²	5 m	
		Negative power supply cable.	16 mm ²	1 m	
30A					06090
		Positive power supply cable.	6 mm ²	5 m	
		Negative power supply cable.	6 mm ²	1 m	

POWER CABLES



Power cables made from a high-conductivity alloy and finished with a soft-touch sheath for increased flexibility.



Go to the category



POWERcable

061001		1 mm ²	100 m	Coil
061031		4 mm ²	25 m	1 pc
061051		6 mm ²	25 m	Coil
061071		8,5 mm ²	25 m	Coil
061091		15 mm ²	10 m	Coil
061191		21 mm ²	10 m	Coil
061112		1,5 mm ²	5 m	1 pc
061041		4 mm ²	50 m	Coil
061061		6 mm ²	50 m	Coil
061081		8,5 mm ²	50 m	Coil
061082		8,5 mm ²	10 m	Coil
061101		15 mm ²	20 m	Coil
061201		21 mm ²	20 m	Coil
061231		35 mm ²	15 m	Coil

SPEAKER CABLES



Power cables made from a high-conductivity alloy and finished with a soft-touch sheath for increased flexibility.



Go to the category



SPEAKERcable

061472		0,35 mm ² x 2	10 m	1 pc
061401		0,5 mm x 2	100 m	Coil
061412		0,75 mm x 2	10 m	1 pc
061421		1 mm ² x 2	50 m	Coil
061431		1,5 mm ² x 2	50 m	Coil
061432		1,5 mm ² x 2	10 m	1 pc
061441		2 mm ² x 2	50 m	Coil
061451		2,5 mm ² x 2	50 m	Coil
061452		2,5 mm ² x 2	10 m	1 pc
061461		3 mm ² x 2	25 m	Coil
061521		1 mm ² x 2	50 m	Coil
061531		1,5 mm ² x 2	50 m	Coil
061541		2 mm ² x 2	50 m	Coil
061551		2,5 mm ² x 2	50 m	Coil
061571		4 mm ² x 2	25 m	Coil
061491		0,75 mm ² x 4	50 m	Coil
061591		1 mm ² x 4	25 m	Coil

RCA AUDIO AND AUDIO/VIDEO CABLES



RCA cables made from a high-conductivity alloy and finished with a soft-touch sheath for increased flexibility.



Go to the category



RCA cable

TRIPLE SHIELDED

triple shielding: nylon, PVC, nylon and aluminium




06032	AUDIO		2 m	1 pc
06035	AUDIO		5 m	1 pc
06037	AUDIO		5 m	1 pc



DOUBLE SHIELDED

double shielding: PVC, nylon and aluminium



06020	AUDIO		60 cm	1 pc
06021	AUDIO		1 m	1 pc
06022	AUDIO		2 m	1 pc
06024	AUDIO		4 m	1 pc
06025	AUDIO		5 m	1 pc
060253	AUDIO		5 m	20 pcs
06026	AUDIO		6 m	1 pc
06028	AUDIO 2M>1F		30 cm	2 pcs
06029	AUDIO 2F>1M		30 cm	2 pcs



SINGLE SHIELDED

single shielding



06011	AUDIO		1 m	1 pc
06012	AUDIO		2 m	1 pc
06014	AUDIO		4 m	1 pc
06015	AUDIO		5 m	1 pc
060153	AUDIO		5 m	20 pcs
061251	AUDIO	WITHOUT CONNECTOR	50 m	1 pc
06018	AUDIO VIDEO		2 m	1 pc
06019	AUDIO VIDEO		5 m	1 pc





IMPROVE
YOUR
EXPERIENCE



Phonocar S.p.A.

Via F.lli Cervi 167/C • 42124 Reggio Emilia (Italy)

Tel. 0522 941621 • Fax 0522 1602093 • info@phonocar.it

Export Office +39 0522 941243 • info@phonocar.eu

phonocar.it    